


CALFINN

COMPAC

Axle Stands 5000 - 10000KG



Model	Max (KG x1000)	A (mm)	B (mm)	C (mm)	P (mm)	KG (mm)
CAX 5	5	365	605	420	6	6,5
CAX 7	7	370	600	430	6	9,7
CAX 7H	7	550	970	600	7	13,8
CAX 10S	10	320	500	230	Screw	11,6
CAX 10HS	10	475	725	395	Screw	15,0




Hydraulic Body Repair Kits

Ideal for spreading and pushing applications. Hydraulic body repair kits are ideal for various applications in automotive body repair workshops, industrial applications, etc.



Quick-lock feature with lock rings on most components ensure that the kit is fast to assemble, change and disassemble. The component No 6 is with threads.

4 & 10 ton hydraulic power units

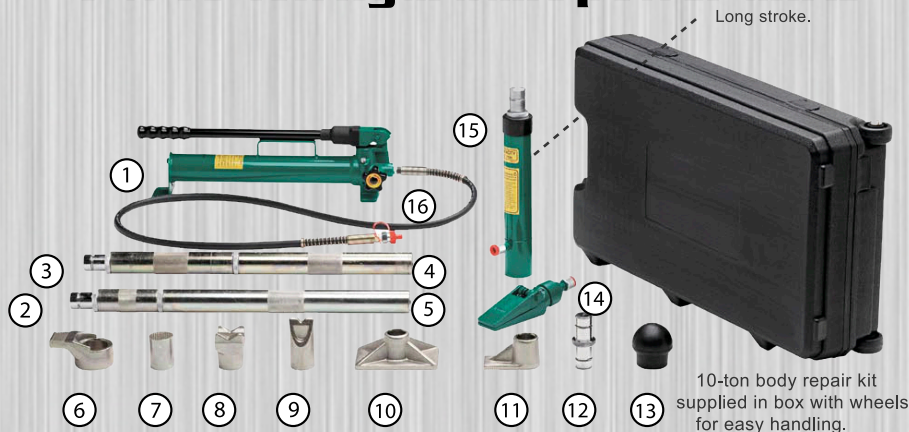

CRK 4	CRK 10
1 4 ton hydraulic power unit	10 ton hydraulic power unit
2 Quick-lock tube, 100 mm.	Quick-lock tube, 125 mm.
3 Quick-lock tube, 200 mm.	Quick-lock tube, 250 mm.
4 Quick-lock tube, 300 mm.	Quick-lock tube, 350 mm.
5 Quick-lock tube, 400 mm.	Quick-lock tube, 475 mm.
6 Threaded toe adapter	Threaded toe adapter
7 Saddle	Saddle
8 Wedge head	Wedge head

CRK 4	CRK 10
9 "V" head	"V" head
10 Base	Base
11 Angle head	Angle head
12 Connector	Connector
13 Flexible rubber head	Flexible rubber head
14 Spreader (Max 500 kg.)	Spreader (Max 500 kg.)
15 Cylinder, 100 mm. stroke.	Cylinder, 150 mm. stroke.
16 Flexible hose, 1800 mm.	Flexible hose, 1800 mm.



WARNING: The capacity of the hydraulic system exceeds the maximum of the spreader and other adapters. Please see maximum capacity per component in the instruction manual.